


Product Features

-  Opening trip time: $\leq 28\text{ms}$ at rated voltage
-  Reliable tripping at 48% rated voltage
-  No tripping at 30% rated voltage
-  Mechanical endurance: $\geq 10,000$ operations
-  Zinc-nickel alloy plating, salt spray resistance ≥ 300 hours

Model Composition and Meaning

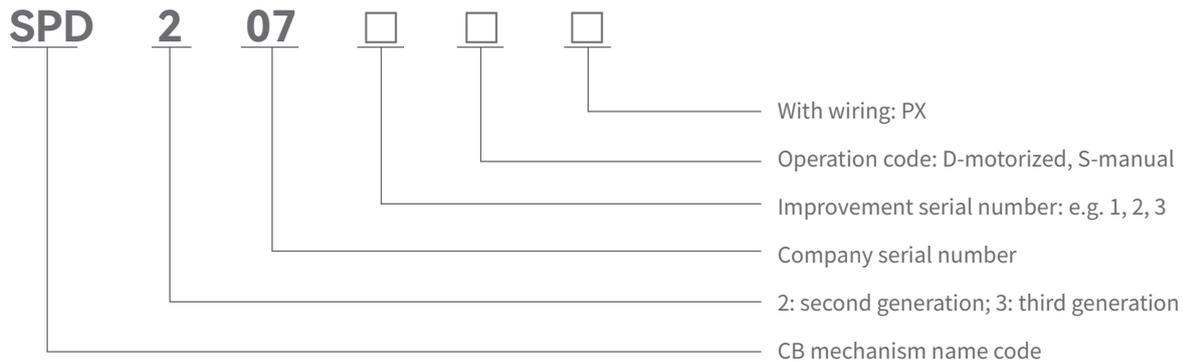

Operating Instructions



Charging Operation

Check for transport damage. Mount mechanism on switch. Insert handle into lower right part, turn clockwise (or energize motor) until a "click" is heard — charging complete.



Closing Operation

Press close button — main circuit closes under spring force. For electric operation, energize closing coil. Mechanism closes and charges opening spring. Recharging allowed, but closing again is interlocked.



Opening Operation

Press open button — main circuit opens under spring force. For electric operation, energize opening coil.